

F-16S

NO GAS. NO HOSE. NO COMPETITION.

CLIOOOTN

16 Ga. 2½" Finish Nailer The World's First Cordless Pneumatic

SENCO's F-16S, featuring Fusion Technology, has the power and utility of a pneumatic tool combined with the convenience of a cordless tool to drive $2\frac{1}{2}$ " finish nails into the hardest woods. Our patented design provides an instant shot when the trigger is pulled with no ramp-up time. Perfect for trim crews, remodelers, punch-out, or anyone who does not want to deal with the hassle of a hose and compressor. Save up to \$300 a year by not having to buy any fuel cells!



Specifications

Item#	600001N
Selectable actuation trigger	
Tool Weight	6.0 lbs (2.72 kg)
Height	13" (330 mm)
Length	11" (279 mm)
Width	3" (76 mm)
Fastener Capacity	110
Battery	18v Li-ion
Charger	80% in 15 minutes
_	100% in 45 minutes

34 1 1¼ 1½ 1¾ 2 2½ 16 Ga. | | | | | |

Fastener Specifications

Gauge 16 Finish nails

Fastener Range. 34" – 2½" (32 mm – 63 mm)

Finish Galvanized Collation Straight glued strip

SENCO 16 Ga. Straight Strip T-head Nails

Length	Carton Item Code	Count	Point	Finish	Coating	Package
3/4	M001000	2.M	Chisel	Galv	Sencote	Вох
1	M001001	2.M	Chisel	Galv	Sencote	Вох
11⁄4	M001002	2.M	Chisel	Galv	Sencote	Box
11/2	M001003	2.M	Chisel	Galv	Sencote	Box
1¾	M001004	2.M	Chisel	Galv	Sencote	Box
2	M001005	2.M	Chisel	Galv	Sencote	Вох
2½	M001007	2.M	Chisel	Galv	Sencote	Вох
1	A401009	1.2M	Chisel	Galv	Plain	Clamshell
11⁄4	A401259	1.2M	Chisel	Galv	Plain	Clamshell
1½	A401509	0.7M	Chisel	Galv	Plain	Clamshell
1¾	A401759	0.7M	Chisel	Galv	Plain	Clamshell
2	A402009	0.7M	Chisel	Galv	Plain	Clamshell
21/2	A402509	0.7M	Chisel	Galv	Plain	Clamshell
Variety Pack	A409809	M8.0	Chisel	Galv	Plain	Clamshell

Applications

Finish and Trim, Baseboard, Cabinets, Caskets, Chair Rail, Decorative Trim, Door & Window Casing, Furniture Trim, Paneling

Features and Benefits


- Patented Reflex-Shot Design Instant trigger response
- Robust Aluminum Drive Cylinder, Rugged Carbon Fiber Magazine - Resistant to damage
- Eco-Friendly Energy 18v Li-ion Battery Powerful and consistent
- Selectable Drive Switch Contact or sequential actuation
- Nose Mounted LED Light Illuminated work surface
- Adjustable Belt Hook Left or right mount
- Thumbwheel Depth-of-Drive Perfect counter-sinks
- Innovative EZ-Clear Feature Clears jams fast



F-16S

NO GAS. NO HOSE. NO COMPETITION.

16S Ga. Brad Nailer The World's First Cordless Pneumatic **Features**

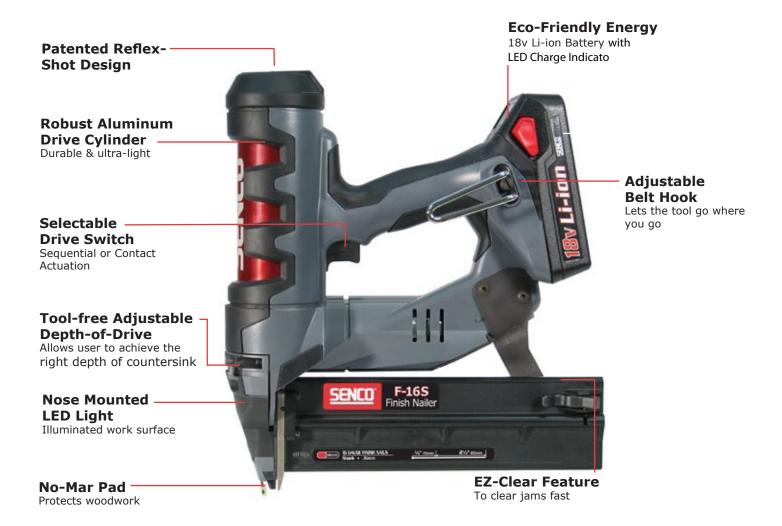

Choose the right actuation mode!

Sequential Actuation (also known as restrictive trigger or trigger fire) operates in the following a sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on trigger systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: www.senco.com